


SAE100 R10

RS10

4 Steel Wire Spiral

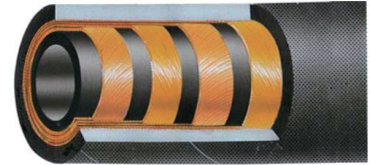

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RS10-05R10	-3	3/16	4.6	5.4	14.3	15.9	18.3	19.8	700	10150	2800	40600	100	610	20/40
RS10-06R10	-4	1/4	6.2	7	15.8	17.4	19.8	21.4	610	8845	2450	35525	125	730	20/40
RS10-10R10	-6	3/8	9.3	10.1	19	20.6	23	24.6	525	7613	2100	30450	150	820	20/40
RS10-13R10	-8	1/2	12.5	13.7	23	24.6	27	28.6	435	6308	1750	25375	200	960	20/40
RS10-19R10	-12	3/4	19	20.2	30.9	32.5	35.7	37.3	350	5075	1400	20300	280	1650	20/40
RS10-25R10	-16	1	25.4	27	38.9	40.5	43.3	45.6	280	4060	1120	16240	360	2300	20/40
RS10-32R10	-20	1-1/4	31.8	33.4	44.8	47.2	49.2	52.4	210	3045	840	12180	460	3250	20/40
RS10-38R10	-24	1-1/2	38.1	39.7	51.1	53.6	55.6	58.7	175	2538	700	10150	560	3950	20/40
RS10-51R10	-32	2	50.8	52.6	64.6	67.1	69.1	72.1	175	2538	700	10150	710	4950	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

Wojun R10(**)(DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	SAEJ517 2001 VISION	COLOUR	 BLACK
-------	---------------------	--------	--