


SAE100 R12

RS12

4 Steel Wire Spiral

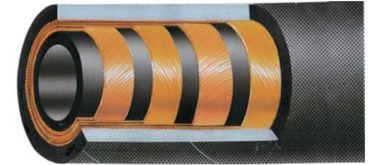

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.
 TEMPERATURE RANGE : -40°C~+120°C / -40°F~+248°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RS12-10R12	-6	3/8	9.3	10.1	16.6	17.8	19.5	21.0	280	4060	1120	16240	125	700	20/40
RS12-13R12	-8	1/2	12.3	13.5	19.9	21.5	23.0	24.6	280	4060	1120	16240	180	830	20/40
RS12-16R12	-10	5/8	15.5	16.7	23.8	25.4	26.6	28.2	280	4060	1120	16240	200	1120	20/40
RS12-19R12	-12	3/4	18.6	19.8	26.9	28.4	29.9	31.5	280	4060	1120	16240	240	1430	20/40
RS12-25R12	-16	1	25.0	26.4	34.1	35.7	36.8	39.2	280	4060	1120	16240	300	2000	20/40
RS12-32R12	-20	1-1/4	31.4	33.0	42.7	45.1	45.4	48.6	210	3045	840	12180	420	2800	20/40
RS12-38R12	-24	1-1/2	37.7	39.3	49.2	51.6	51.9	55.0	175	2540	700	10150	500	3400	20/40
RS12-51R12	-32	2	50.8	52.0	62.5	64.8	65.1	68.3	175	2540	700	10150	640	4250	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

WOJUN SAE100 R12(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	SAE J517	COLOUR	 BLACK
-------	----------	--------	--