


SAE100 R15

RS15

4 – 6 Steel Wire Spiral

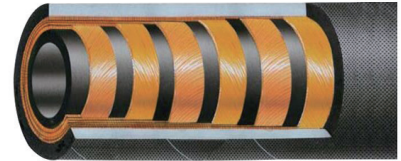

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 OR 6 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.
 TEMPERATURE RANGE : -40°C~+120°C / -40°F~+248°F


TYPE	SIZE		 ID (mm)		 ROD (mm)	 OD (mm)	 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	max	max	bar	psi	bar	psi	mm	g/m	max/m
RS15-10R15	-6	3/8	9.3	10.1	20.3	23.3	420	6090	1680	24360	150	800	20/40
RS15-13R15	-8	1/2	12.3	13.5	24.0	26.8	420	6090	1680	24360	200	950	20/40
RS15-19R15	-12	3/4	18.6	19.8	32.9	36.1	420	6090	1680	24360	265	1850	20/40
RS15-25R15	-16	1	25.0	26.4	38.9	42.9	420	6090	1680	24360	330	2900	20/40
RS15-32R15	-20	1-1/4	31.4	33.0	48.4	51.5	420	6090	1680	24360	445	4200	20/40
RS15-38R15	-24	1-1/2	37.7	39.3	56.3	59.6	420	6090	1680	24360	530	5600	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

 SAE100 R15(**)(DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	SAE J517	COLOUR	 BLACK
-------	----------	--------	--