


# SAE100 R17

# RB17

## 1-2 Steel Wire Braid

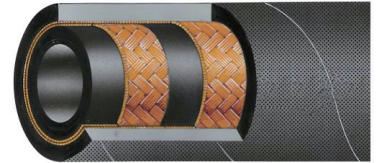

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 1 OR 2 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR MEDIUM PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY AND AGRICULTURE.

TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)	OD (mm)	WP		BP		BR/r	W	L
	Dash Size	inch	min	max	max	max	bar	psi	bar	psi	mm	g/m	max/m
RB17-5R17	-3	3/16	4.6	5.4	10.1	11.6	210	3045	840	12180	45	150	50/100
RB17-6R17	-4	1/4	6.2	7.0	11.0	13.2	210	3045	840	12180	50	169	50/100
RB17-8R17	-5	5/16	7.7	8.5	13.0	15.0	210	3045	840	12180	55	210	50/100
RB17-10R17	-6	3/8	9.3	10.1	15.0	17.0	210	3045	840	12180	65	254	50/100
RB17-13R17	-8	1/2	12.3	13.5	18.8	21.1	210	3045	840	12180	90	466	50/100
RB17-16R17	-10	5/8	15.5	16.7	23.6	25.9	210	3045	840	12180	100	586	50/100
RB17-19R17	-12	3/4	18.6	19.8	27.7	30.3	210	3045	840	12180	120	749	50/100
RB17-25R17	-16	1	25.0	26.4	35.6	38.6	210	3045	840	12180	150	1457	50/100

### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**WOJUN** SAE100 R17(\*\*\*) (DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

NORMS	SAE J517	COLOUR				
			BLACK	BLUE	RED	GRAY