






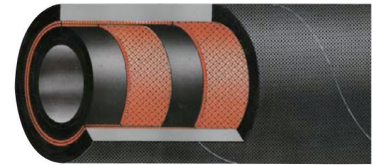


# SAE 100 R3

# RB03

## 2 Textile Braid



TUBE : HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT : 2 HIGH TENSILE SYNTHETIC TEXTILE BRAID.  
 COVER : OIL, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION : FOR HYDRAULIC CONTROL LINES, DISCHARGE UNDER MEDIUM PRESSURE OF HYDRAULIC FLUIDS, FUEL OIL, GREASE, AIR AND WATER.  
 TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F

TYPE	SIZE		 ID (mm)		 OD (mm)		 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RB03-05R3	-3	3/16	4.5	5.4	11.9	13.5	105	1520	420	6090	75	160	25/50
RB03-06R3	-4	1/4	6.1	7.0	13.5	15.1	87	1260	350	5075	75	180	25/50
RB03-08R3	-5	5/16	7.6	8.5	16.7	18.3	84	1220	335	4860	100	270	25/50
RB03-10R3	-6	3/8	9.2	10.1	18.3	19.8	78	1130	315	4570	100	310	25/50
RB03-13R3	-8	1/2	12.4	13.5	23.0	24.6	70	1015	280	4060	125	450	25/50
RB03-16R3	-10	5/8	15.6	16.7	26.2	27.8	61	885	245	3550	140	530	25/50
RB03-19R3	-12	3/4	18.7	19.8	31.0	32.5	52	750	210	3045	150	720	25/50
RB03-25R3	-16	1	25.1	26.2	36.9	39.3	39	570	157	2280	205	900	25/50
RB03-32R3	-20	1-1/4	31.4	32.9	42.9	46.0	26	380	105	1520	250	1070	25/50





### OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

**WOJUN** R3(\*\*)(DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*(YEAR)

NORMS	SAE J517	COLOUR	 BLACK	 BLUE	 RED	 GRAY