


1 Textile Braid

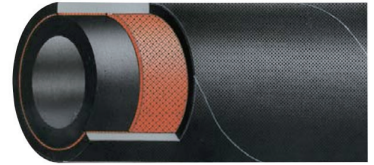

TUBE : HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 1 HIGH TENSILE SYNTHETIC TEXTILE BRAID.

COVER : OIL, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR HYDRAULIC CONTROL LINES, DISCHARGE UNDER LOW PRESSURE OF HYDRAULIC FLUIDS, FUEL OIL, GREASE, AIR AND WATER.

TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F

TYPE	SIZE		ID (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RB06-05R6	-3	3/16	4.2	5.4	10.3	11.9	35	510	140	2030	50	100	25/50
RB06-06R6	-4	1/4	5.6	7.2	11.9	13.5	28	410	112	1620	65	130	25/50
RB06-08R6	-5	5/16	7.2	8.8	13.5	15.1	28	410	112	1620	75	150	25/50
RB06-10R6	-6	3/8	8.7	10.3	15.1	16.7	28	410	112	1620	75	180	25/50
RB06-13R6	-8	1/2	11.9	13.5	19.0	20.6	28	410	112	1620	100	260	25/50
RB06-16R6	-10	5/8	15.1	16.7	22.2	23.8	24	350	96	1420	125	310	25/50
RB06-19R6	-12	3/4	18.3	19.9	25.4	27.8	21	310	84	1220	150	400	25/50

OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

WOJUN R6(**)(DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	SAE J517	COLOUR				
			BLACK	BLUE	RED	GRAY