








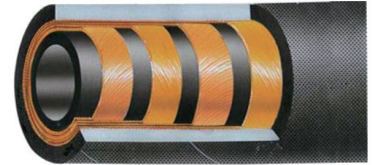

4 Steel Wire Spiral



TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F


TYPE	SIZE		 ID (mm)		 ROD (mm)		 OD (mm)		 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RS09-10R9	-6	3/8	9.3	10.1	16.9	18.0	20.6	22.2	315	4570	1260	18270	125	700	20/40
RS09-13R9	-8	1/2	12.3	13.5	19.4	21.0	23.8	25.4	280	4060	1120	16240	180	830	20/40
RS09-19R9	-12	3/4	18.6	19.8	26.6	28.2	30.6	32.2	210	3045	840	12180	240	1300	20/40
RS09-25R9	-16	1	25.0	26.4	34.5	36.1	38.5	40.9	210	3045	840	12180	300	1700	20/40
RS09-32R9	-20	1-1/4	31.4	33.0	43.3	45.6	49.2	52.4	175	2540	700	10150	420	3080	20/40
RS09-38R9	-24	1-1/2	37.7	39.3	49.6	52.0	55.6	58.7	140	2030	560	8120	500	4300	20/40
RS09-51R9	-32	2	50.4	52.0	63.9	66.2	69.9	73.0	140	2030	560	8120	660	5630	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

 R9(***) (DN**mm) W.P.**BAR/**PSI *Q/***(YEAR)

NORMS	SAEJ517 2001 VISION	COLOUR	 BLACK
-------	---------------------	--------	--