






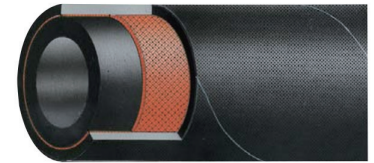


# EN854 1TE

# EB41

## 1 Textile Braid



TUBE : HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT : 1 HIGH TENSILE SYNTHETIC TEXTILE BRAID.  
 COVER : OIL, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION : FOR HYDRAULIC CONTROL LINES, DISCHARGE UNDER LOW PRESSURE OF HYDRAULIC FLUIDS, FUEL OIL, GREASE, AIR AND WATER.  
 TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F


TYPE	SIZE		 ID (mm)		 OD (mm)		 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
EB41-051TE	-3	3/16	4.9	5.2	10.0	11.6	25	363	100	1450	35	90	25/50
EB41-061TE	-4	1/4	6.4	6.9	11.6	13.2	25	363	100	1450	45	110	25/50
EB41-081TE	-5	5/16	7.9	8.4	13.1	14.7	20	290	80	1160	65	130	25/50
EB41-101TE	-6	3/8	9.5	10.0	14.7	16.3	20	290	80	1160	75	150	25/50
EB41-131TE	-8	1/2	12.7	13.3	17.7	19.7	16	232	64	928	90	190	25/50
EB41-161TE	-10	5/8	15.8	16.5	21.9	23.9	16	232	64	928	115	280	25/50





### OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

 1TE(\*\*)(DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*(YEAR)

NORMS	EN854	COLOUR				
			BLACK	BLUE	RED	GRAY