


## 2 Steel Wire Braid

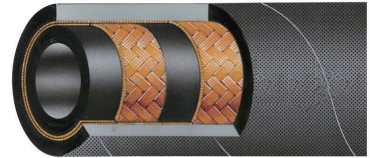

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS USING HYDRAULIC OILS, MINERAL AND VEGETABLE LUBRICANTS.

TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F

TYPE	SIZE		 ID (mm)		 ROD (mm)		 OD (mm)	 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	min	max	max	bar	psi	bar	psi	mm	g/m	max/m
EB72-06	-04	1/4"	6.4	6.9	10.6	11.7	14.2	400	5800	1600	23200	75	300	50/100
EB72-08	-05	5/16"	7.9	8.5	12.1	13.3	16.0	350	5075	1400	20300	85	340	50/100
EB72-10	-06	3/8"	9.5	10.1	14.4	15.6	18.3	330	4785	1320	19140	90	420	50/100
EB72-13	-08	1/2"	12.7	13.5	17.5	19.1	21.5	275	3988	1100	15950	130	540	50/100
EB72-16	-10	5/8"	15.8	16.7	20.5	22.3	24.7	250	3625	1000	14500	170	680	50/100
EB72-19	-12	3/4"	18.8	19.8	24.6	26.4	28.6	215	3118	860	12470	200	800	50/100
EB72-25	-16	1"	25.4	26.4	32.5	34.3	36.6	165	2393	660	9570	250	1150	50/100





### OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

**WOJUN** DIN-EN 857 2SC(\*\*²)(DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

NORMS	EN857	COLOUR	   
			BLACK      BLUE      RED      GRAY