





EN854 2TE

EB42

2 Textile Braid

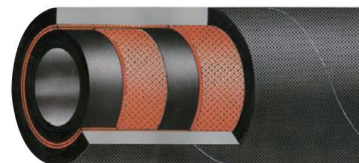

TUBE : HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 2 HIGH TENSILE SYNTHETIC TEXTILE BRAID.
 COVER : OIL, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC CONTROL LINES, DISCHARGE UNDER MEDIUM PRESSURE OF HYDRAULIC FLUIDS, FUEL OIL, GREASE, AIR AND WATER.
 TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F


TYPE	SIZE		 ID (mm)		 OD (mm)		 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
EB42-052TE	-3	3/16	4.9	5.2	11.0	12.6	80	1160	320	4640	35	120	25/50
EB42-062TE	-4	1/4	6.4	6.9	12.6	14.2	75	1088	300	4352	40	140	25/50
EB42-082TE	-5	5/16	7.9	8.4	14.1	15.7	68	986	272	3944	50	160	25/50
EB42-102TE	-6	3/8	9.5	10.0	15.7	17.3	63	914	252	3656	60	180	25/50
EB42-132TE	-8	1/2	12.7	13.3	18.7	20.7	58	841	232	3364	70	220	25/50
EB42-162TE	-10	5/8	15.8	16.5	22.9	24.9	50	725	200	2900	90	320	25/50
EB42-192TE	-12	3/4	18.8	19.8	26.0	28.0	45	653	180	2612	110	370	25/50
EB42-252TE	-16	1	25.4	26.2	32.9	35.9	40	580	160	2320	130	550	25/50





OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

 2TE(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	EN854	COLOUR				
			BLACK	BLUE	RED	GRAY