


# EN854 3TE

# EB43

## 2 Textile Braid

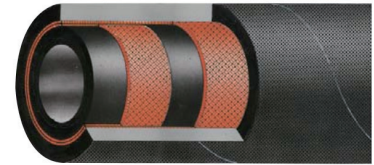

TUBE : HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT : 2 HIGH TENSILE SYNTHETIC TEXTILE BRAID.  
 COVER : OIL, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION : FOR HYDRAULIC CONTROL LINES, DISCHARGE UNDER MEDIUM PRESSURE OF HYDRAULIC FLUIDS, FUEL OIL, GREASE, AIR AND WATER.  
 TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F

TYPE	SIZE		ID (mm)		OD (mm)		WP		BP		BR/r	W	L
	dash	inch	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
EB43-053TE	-3	3/16	4.9	5.2	12	13.6	160	2320	640	9280	40	129	25/50
EB43-063TE	-4	1/4	6.4	6.9	13.6	15.2	145	2103	580	8412	45	153	25/50
EB43-083TE	-5	5/16	7.9	8.4	16.1	17.7	130	1885	520	7540	55	210	25/50
EB43-103TE	-6	3/8	9.5	10.0	17.7	19.3	110	1595	440	6380	70	241	25/50
EB43-123TE	-8	1/2	12.7	13.3	20.7	22.7	93	1349	372	5396	85	299	25/50
EB43-163TE	-10	5/8	15.8	16.5	24.9	26.9	80	1160	320	4640	105	405	25/50
EB43-193TE	-12	3/4	18.8	19.8	28.0	30.0	70	1015	280	4060	130	470	25/50
EB43-253TE	-16	1	25.4	26.2	34.4	37.4	55	798	220	3192	150	633	25/50
EB43-313TE	-20	1-1/4	31.8	32.8	40.8	43.8	45	653	180	2612	190	774	20/40
EB43-383TE	-24	1-1/2	38.1	39.1	47.6	51.6	40	580	160	2320	240	973	20/40
EB43-513TE	-32	2	50.6	51.8	60.3	64.3	33	479	132	1916	300	1246	20/40

### OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

**Wojun** 3TE(\*\*\*) (DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

NORMS	EN854	COLOUR				
			BLACK	BLUE	RED	GRAY