


4 Steel Wire Spiral

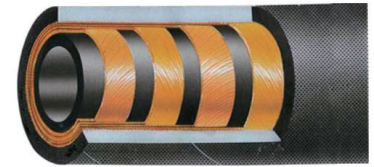

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.
 COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
ES62-194SH	-12	3/4	19.1	19.8	27.6	29.2	31.4	33.0	420	6090	1680	24360	280	1700	20/40
ES62-254SH	-16	1	25.5	26.4	34.4	36.0	37.5	39.9	380	5510	1520	22040	340	2500	20/40
ES62-324SH	-20	1-1/4	32.0	33.0	40.9	42.9	43.9	47.1	325	4710	1300	18850	460	3000	20/40
ES62-384SH	-24	1-1/2	38.2	39.3	47.8	49.8	51.9	55.1	290	4250	1160	16820	560	3600	20/40
ES62-514SH	-32	2	50.6	52.0	62.2	64.2	66.5	69.7	250	3625	1000	14500	700	5000	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

WOJUN 4SH(**)(DN**mm) W.P.**BAR/**PSI *Q/***(YEAR)

NORMS	EN856	COLOUR	 BLACK
-------	-------	--------	--