


MARINE HEAVY-DUTY HOSE

MS06

6 – 8 Steel Wire Spiral

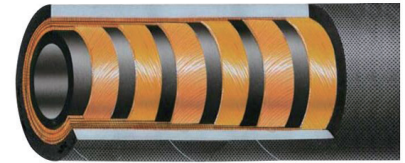

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 6 OR 8 HIGH TENSILE STEEL SPIRAL.

COVER : HYDRAULIC OIL,HIGH ABRASION WITH UHMWPE AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION :FOR MARINE HEAVY-DUTY CRANE AND OTHER RELEVANT MARINE HYDRAULIC SYSTEM.

TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
MS06-51	-32	2"	50.5	51.5	66.9	68.5	69.5	71.1	350	5075	1400	20300	600	11200	40
MS06-63	-40	2-1/2"	63.0	64.5	79.5	82.5	82.5	85.5	350	5075	1400	20300	800	18500	40
MS08-76	-48	3"	74.8	76.3	95.5	98.5	99.0	102.0	350	5075	1400	20300	1000	32500	40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

Wojun MARINE HEAVY-DUTY HOSE(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS		COLOUR	 BLACK
-------	--	--------	--