


# OIL HOSE

## 20BAR 300PSI

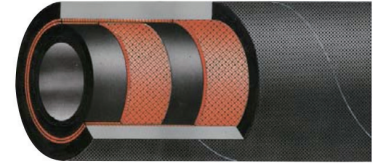

TUBE : SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE.  
 COVER : ABRASION,OZONE AND WEATHER RESISTANT SPECIAL BLACK SYNTHETIC RUBBER.  
 APPLICATION : USED IN LOW-PRESSURE OIL CONVENING SYSTEMS.  
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE	ID (mm)		OD (mm)		WP		BP		W	L
		min	max	min	max	bar	psi	bar	psi	g/m	max/m
BF01-06	1/4"	6.2	7.0	12.7	14.3	20	300	60	900	170	25/50
BF01-08	5/16"	7.7	8.5	14.7	16.3	20	300	60	900	210	25/50
BF01-10	3/8"	9.3	10.1	16.7	18.3	20	300	60	900	250	25/50
BF01-13	1/2"	12.6	13.8	21.0	23	20	300	60	900	380	25/50
BF01-16	5/8"	15.6	16.8	24.6	26.6	20	300	60	900	490	25/50
BF01-19	3/4"	18.6	19.8	28.4	30.4	20	300	60	900	600	25/50
BF01-25	1"	24.8	26.0	35.5	37.5	20	300	60	900	800	25/50
BF01-32	1-1/4"	31.8	33.0	42.8	45.2	20	300	60	900	1100	20/40
BF01-38	1-1/2"	37.8	39.0	49.3	51.7	20	300	60	900	1340	20/40
BF01-51	2"	50.6	51.8	64.3	66.7	20	300	60	900	2000	20/40


### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**WOJUN** OIL HOSE(\*\*\*)(DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

		COLOUR	 BLACK
--	--	--------	--