


# SUPER FLEXIBLE HYDRAULIC HOSE

# SS04

## UP TO 0.4M IMPULSE 4 Steel Wire Spiral

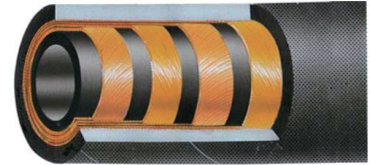

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.

COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : SUPER FLEXIBLE AND HIGH IMPULSE PERFORMANCE TO REPLACE EN853 STANDARD HOSE.

TEMPERATURE RANGE : -40°C~+121°C / -40°F~+248°F

| TYPE        | SIZE      |       | ID (mm) |      | ROD (mm) |      | OD (mm) |      | WP  |      | BP   |       | BR/r | W    | L     |
|-------------|-----------|-------|---------|------|----------|------|---------|------|-----|------|------|-------|------|------|-------|
|             | Dash Size | inch  | min     | max  | min      | max  | min     | max  | bar | psi  | bar  | psi   | mm   | g/m  | max/m |
| SS04-604SK  | -4        | 1/4   | 6.4     | 6.8  | 12.2     | 13.2 | 14.4    | 15.4 | 450 | 6525 | 1800 | 26100 | 45   | 440  | 20/40 |
| SS04-804SK  | -5        | 5/16  | 8.0     | 8.5  | 13.8     | 14.8 | 15.9    | 16.9 | 430 | 6235 | 1720 | 24940 | 50   | 490  | 20/40 |
| SS04-1004SK | -6        | 3/8   | 9.5     | 9.9  | 16.2     | 17.2 | 18.2    | 19.2 | 420 | 6090 | 1680 | 24360 | 55   | 590  | 20/40 |
| SS04-1304SK | -8        | 1/2   | 12.7    | 13.3 | 19.3     | 20.3 | 21.3    | 22.3 | 350 | 5075 | 1400 | 20300 | 60   | 710  | 20/40 |
| SS04-1604SK | -10       | 5/8   | 15.8    | 16.4 | 22.4     | 23.6 | 24.5    | 25.7 | 300 | 4350 | 1200 | 17400 | 80   | 850  | 20/40 |
| SS04-1904SK | -12       | 3/4   | 19.0    | 19.6 | 26.0     | 27.0 | 28.0    | 29.0 | 280 | 4060 | 1120 | 16240 | 110  | 1140 | 20/40 |
| SS04-2504SK | -16       | 1     | 25.0    | 25.6 | 33.4     | 34.4 | 35.6    | 36.6 | 280 | 4060 | 1120 | 14500 | 150  | 1390 | 20/40 |
| SS04-3204SK | -20       | 1-1/4 | 31.6    | 32.4 | 43.2     | 44.4 | 45.8    | 47.0 | 220 | 3190 | 880  | 12760 | 190  | 2150 | 20/40 |
| SS04-3804SK | -24       | 1-1/2 | 37.7    | 38.5 | 49.5     | 50.7 | 52.5    | 53.7 | 200 | 2900 | 800  | 11600 | 250  | 2520 | 20/40 |
| SS04-5104SK | -32       | 2     | 50.6    | 51.5 | 62.1     | 63.7 | 65.1    | 66.7 | 200 | 2900 | 800  | 11600 | 300  | 3490 | 20/40 |


### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**Wojun** SUPER FLEXIBLE SS04(\*\*\*)(DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

|       |              |        |  |
|-------|--------------|--------|--|
| NORMS | EXCEED EN853 | COLOUR | <br>BLACK |
|-------|--------------|--------|--|