


# EN853 PRESSURE WASH HOSE

## 1 Steel Wire Braid

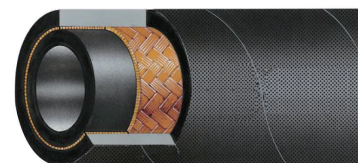

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT : 1 HIGH TENSILE STEEL WIRE BRAID.  
 COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION : FOR LOW-MEDIUM PRESSURE CLEANING APPLICATIONS WITH HOT WATER TEMPERATURES ARE UP TO 100°C  
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)	WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	max	bar	psi	bar	psi	mm	g/m	max/m
HEB31-06	-04	1/4"	6.4	7.0	10.6	11.6	14.1	225	3263	900	13050	100	390	50/100
HEB31-08	-05	5/16"	7.9	8.5	12.1	13.3	15.7	215	3118	850	12325	115	435	50/100
HEB31-10	-06	3/8"	9.5	10.1	14.5	15.7	18.1	180	2610	720	10440	130	510	50/100
HEB31-13	-08	1/2"	12.7	13.5	17.5	19.1	21.4	160	2320	640	9280	180	605	50/100
HEB31-16	-10	5/8"	15.8	16.7	20.6	22.2	24.5	130	1885	520	7540	200	685	50/100
HEB31-19	-12	3/4"	18.8	19.8	24.6	26.2	28.5	105	1523	420	6090	240	820	50/100
HEB31-25	-16	1"	25.4	26.4	32.5	34.1	36.6	88	1276	350	5075	300	1135	50/100

### OPTIONS




SMOOTH COVER

MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**WOJUN** PRESSURE WASH 1SN(\*\*\*) (DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR) 100°C MAX

NORMS	EN 853	COLOUR	   
			BLACK BLUE RED GRAY