


HIGH PRESSURE & LOW TEMP

HR17L

2 Steel Wire Braid -55°C

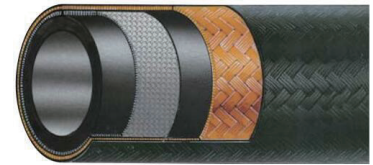

TUBE : OIL AND HEAT-RESISTANT SYNTHETIC RUBBER.

REINFORCEMENT : 1 OR 2 HIGH TENSILE WIRE BRAID.

COVER : OIL, WEATHER AND FLAME -RESISTANT SYNTHETIC RUBBER.

APPLICATION : FOR HYDRAULIC SERVICE IN THE HANDLING OF MOST HYDRAULIC FLUIDS.

TEMPERATURE RANGE : -55°C~+127°C / -67°F~+260°F

TYPE	SIZE	ID (mm)		OD (mm)		WP		BP		BR/r	L
		min	max	min	max	bar	psi	bar	psi		
	inch	min	max	min	max	bar	psi	bar	psi	mm	max/m
HR17L-06	1/4"	6.4	7.0	11.7	12.7	450	6525	1800	26100	50	50/100
HR17L-10	3/8"	9.5	10.0	15.0	16.0	365	5293	1460	21170	65	50/100
HR17L-13	1/2"	12.5	13.2	18.5	19.5	310	4495	1240	17980	90	50/100
HR17L-19	3/4"	18.9	19.7	27.1	28.3	240	3480	960	13920	120	50/100
HR17L-25	1"	25.5	26.3	35.4	36.6	208	3016	832	12064	150	50/100





OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

WOJUN SAE 100 R17 LOW TEMP -55°C(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS	EXCEED SAE J517	COLOUR				
			BLACK	BLUE	RED	GRAY