


# STEAM HOSE

# HB04-02

## 2 Steel Wire Braid

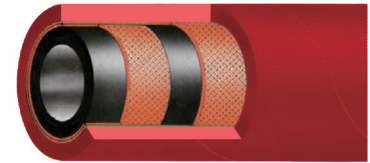

- TUBE : MINERAL, VEGETABLE AND HOT WATER RESISTANT SYNTHETIC RUBBER.  
 REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.  
 COVER : PIN PRICKED, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION : FOR CONVEYING SATURATED STEAM AND HEATED CONDENSATE WATER WITH TEMPERATURE UP TO 210°C.  
 TEMPERATURE RANGE : -40°C~+210°C / -40°F~+410°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
HB04-1002	-6	3/8"	9.5	10.5	17.1	17.9	20.3	21.3	18	261	180	2610	150	420	50/100
HB04-1302	-8	1/2"	12.5	13.5	20.8	21.6	23.7	24.7	18	261	180	2610	200	580	50/100
HB04-1602	-10	5/8"	15.5	16.5	23.8	24.6	26.7	27.7	18	261	180	2610	240	660	50/100
HB04-1902	-12	3/4"	18.5	19.5	26.8	27.2	29.2	30.8	18	261	180	2610	290	800	50/100
HB04-2202	-14	7/8"	21.5	22.5	29.8	30.6	32.7	33.7	18	261	180	2610	330	840	50/100
HB04-2502	-16	1"	24.6	26.2	33.4	34.1	36.1	37.7	18	261	180	2610	380	1000	50/100
HB04-3202	-20	1-1/4"	31.8	32.8	41.0	42.0	43.0	45.0	18	261	180	2610	480	1270	20/40
HB04-3802	-24	1-1/2"	37.8	38.8	47.0	48.0	50.0	52.0	18	261	180	2610	570	1460	20/40
HB04-5102	-32	2"	50.8	51.8	61.0	63.0	64.0	66.0	18	261	180	2610	770	2250	20/40


### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**WOJUN** STEAM HOSE 210°(\*\*\*) (DN\*\*mm) W.P.\*\*BAR/\*\*PSI \*Q/\*\*\*\*(YEAR)

NORMS		COLOUR	 BLACK
-------	--	--------	--