


# SAE100 R19

# RB19

## 2/3 steel Wire Braid

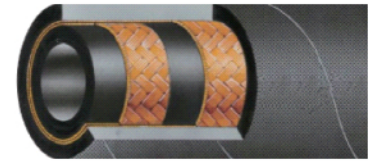

TUBE : MINERAL,VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.  
 REINFORCEMENT :2-3 HIGH TENSILE STEEL WIRE BRAID.  
 COVER :OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.  
 APPLICATION :FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY AND AGRICULTURE.  
 TEMPERATURERANGE :-40°C~+100°C/-40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)	OD (mm)	WP		BP		BR/r	L
	dash	inch	min	max	max	max	bar	psi	bar	psi	mm	max/m
RB19-6R19	-04	1/4"	6.2	7.0	12.4	14.4	280	4060	1120	16240	50	50/100
RB19-8R19	-05	5/16"	7.7	8.5	14.2	16.3	280	4060	1120	16240	55	50/100
RB19-10R19	-06	3/8"	9.3	10.1	16.0	18.0	280	4060	1120	16240	65	50/100
RB19-13R19	-08	1/2"	12.3	13.5	20.4	22.6	280	4060	1120	16240	90	50/100
RB19-16R19	-10	5/8"	15.5	16.7	25.9	27.5	280	4060	1120	16240	100	50/100
RB19-19R19	-12	3/4"	18.6	19.8	29.7	32.5	280	4060	1120	16240	120	50/100
RB19-25R19	-16	1"	25.2	26.4	37.0	39.4	280	4060	1120	16240	150	50/100

### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

**WOJUN** SAE100R19(\*\*)(DN\*\*m m)W.P.\*\*BAR/\*\*PSI\*Q/\*\*\*\*(YEAR)

NORMS	SAEJ517	COLOUR				
			BLACK	BLUE	RED	GRAY

REMARK: 1" IS 3-WIRE BRAID; THE REST ARE 2-WIRE BRAID.

NON-STANDARD SIZES AND LENGTHS ARE AVAILABLE ON REQUEST