


SAE100 R4 LOW TEMP-55°C

LRB04

Textile Braid

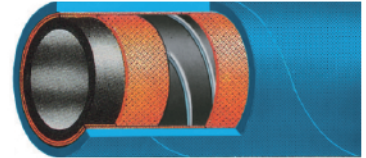

TUBE : HYDRAULIC OIL RESISTANT SPECIAL NBR RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTIL EAN DSTEEL WIRE HELIX.
 COVER : OIL,HEAT,ABRASION,OZONE ANDWEATHER RESISTANT SPECIAL CR RUBBER.
 APPLICATION : IN OIL RETURN LINES OF HYDRAULIC SYSTEMS OF INDUSTRIAL AND AGRICULTURAL
 IN LOW TEMP-55°C APPLICATION.
 TEMPERATURERANGE :-55°C~+100°C/-67°F~+212°F

TYPE	SIZE		ID (mm)		OD (mm)	WP		BP		BR/r	W	L
	dash	inch	min	max	max	bar	psi	bar	psi	mm	g/m	max/m
LRB04-19R4	-12	3/4	18.2	19.8	34.9	21	305	84	1220	125	920	20/40
LRB04-25R4	-16	1	24.6	26.2	41.3	17	247	68	988	150	1100	20/40
LRB04-32R4	-20	1-1/4	30.6	33.0	50.8	14	203	56	812	200	1300	20/40
LRB04-38R4	-24	1-1/2	36.9	39.3	57.2	10.5	152	42	608	255	1800	20/40
LRB04-51R4	-32	2	49.2	52.4	69.9	7	102	28	408	300	2230	20/40
LRB04-63R4	-40	2-1/2	61.9	65.1	82.6	4	58	16	232	355	3230	20/40
LRB04-76R4	-48	3	74.6	77.8	95.3	4	58	16	232	460	4250	20
LRB04-89R4	-56	3-1/2	87.3	90.5	107.9	3	44	12	176	530	5050	20
LRB04-102R4	-64	4	100.0	103.2	120.7	2.5	36	10	144	610	5600	20

OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

WOJUN 100R4(**)(DN**m m)W.P.**BAR/**PSI*Q/***(YEAR)

NORMS	SAEJ517	COLOUR	  BLACK BLUE
-------	---------	--------	---

REMARK: NON-STANDARD SIZES AND LENGTHS ARE AVAILABLE ON REQUEST