


SAND BLAST HOSE

HB09

1 Steel Wire Braid



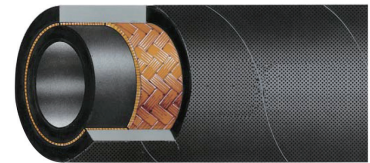





TUBE : SUPER HIGH ABRASION RESISTANT SYNTHETIC RUBBER.

REINFORCEMENT : 1 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR DELIVERY OF METAL SURFACE RUST REMOVAL BY WIND PRESSURE ,SANDING,WET OR DRY SAND BLASTING,ALSO CONVEYING WATER.

TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F


TYPE	SIZE		 ID	 OD	 WP		 BP		 W	 L
	Dash Size	inch	mm	mm	bar	psi	bar	psi	g/m	max/m
HB09-1301	-8	1/2	13	27.0	10	145	30	450	580	50/100
HB09-1901	-12	3/4	19	33.0	10	145	30	450	760	50/100
HB09-2501	-16	1	25	40.0	10	145	30	450	1010	50/100
HB09-3201	-20	1-1/4	32	48.0	10	145	30	450	1690	20/40
HB09-3801	-24	1-1/2	38	55.0	10	145	30	450	2020	20/40
HB09-5101	-32	2	51	71.0	10	145	30	450	3640	20/40
HB09-6401	-40	2-1/2	64	84.0	10	145	30	450	4650	20/40
HB09-7601	-48	3	76	96.0	10	145	30	450	5170	20/40
HB09-8901	-56	3-1/2	89	110.0	10	145	30	450	6370	20/40


OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

 SAND BLAST(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS		COLOUR	 BLACK
-------	--	--------	--