






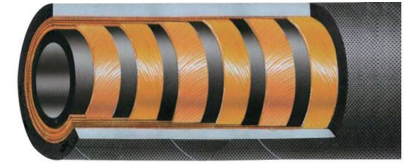


WB 850 (Waterblast 850 bar)

Supper High Pressure Hydraulic hose



- TUBE : MINERAL, VEGETABLE , HYDRAULIC OILS AND GLYCOL BASIS FLUIDS RESISTANT SPECIAL SYNTHETIC RUBBER.
- REINFORCEMENT : 4 or 6 HIGH TENSILE STEEL SPIRAL.
- COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
- APPLICATION : VERY HIGH PRESSURE HOSE FOR WATER SCALING AND JETTING SYSTEMS.
- TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		 ID (mm)	 OD (mm)	 WP		 BP		 BR/r	 W	 L
	Dash Size	inch			bar	psi	bar	psi			
WB850-10	-6	3/8	9.5	21.4	850	12325	2125	30813	155	784	20/40
WB850-13	-8	1/2	12.7	24.5	850	12325	2125	30813	200	1020	20/40
WB850-19	-12	3/4	19	32.8	850	12325	2125	30813	250	1930	20/40
WB850-25	-16	1	25.4	44.6	850	12325	2125	30813	300	3350	20/40


OPTIONS




1000bar

MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

 **WATERBLAST(**)(DN**mm) W.P.**BAR/**PSI *Q/***(YEAR)**

NORMS	DIN EN 1829-2	COLOUR	 BLACK
-------	---------------	--------	----------------------------------------------------------------------------------------------